



**Mediatrix®**  
4100 Series  
Access Devices

The Mediatrix® 4100 access devices are high-quality and cost efficient VoIP gateways connecting larger branch offices and multi-tenant buildings to an IP network, while preserving investment in analog telephones and faxes.

The Mediatrix® 4100 access devices allow Service Providers to deploy rapidly and economically their solutions in medium-size premises and they are the ideal solution for branch office connectivity to larger private networks.

### Key Benefits

#### Voice Functionalities

- Carrier-grade voice quality
- Fax over IP support, including T.38
- PSTN bypass (emergency calls)
- Up to 24 simultaneous calls

#### Ease of configuration and management

- Automatic firmware and configuration file download
- SNMP and web management
- TFTP or HTTP auto-provisioning

#### Security

- Support for SNMPv3
- Encrypted configuration files support
- HTTP Digest authentication

#### Network functionalities

- QoS features support
- DHCP client
- STUN Client

## Mediatrix® 4100 Series 8, 16, or 24-port VoIP Access Device



### Mediatrix 4100 Overview

**The Mediatrix 4100 connects up to 24 analog phones and/or faxes to a broadband modem or LAN.**

The Mediatrix 4100 enables cost-effective VoIP deployments in medium-size branch offices and multi-tenant applications.

The Mediatrix 4100 has the additional benefit of supporting high compression codec's simultaneously on each analog voice ports, thus saving valuable bandwidth.

As all other Mediatrix devices, the 4100 provides web interface, giving users a convenient access to the unit for initial set-up. The devices can also auto-provision by fetching their encrypted configuration from a TFTP or HTTP server making installation secure and transparent to the end-users. To further facilitate deployments, factory loaded configurations are possible.

In addition, an intelligent PSTN bypass allows Mediatrix 4100 users to make emergency calls and maintain their phone service in the event of a power outage or network failure.

Sales Department

Americas - Tel: 1-877-GET-VOIP / (877) 438-8647 Tel: (819) 829-8749 Fax: (819) 829-5100

Europe, Middle East, Africa - Tel: 49 (0)30-3496-2085 / CALA - Tel: (954)-349-0394 Fax: (954) 349-8722

©2007, Mediatrix Telecom, a Division of Media5 Corporation

MIP-GES070219 4100ProductBrochure

## Technical Specifications

### Models

- Mediatrix 4108 : 8 analog FXS ports
- Mediatrix 4116: 16 analog FXS ports
- Mediatrix 4124: 24 analog FXS ports

### IP Telephony Protocol

- SIP – RFC3261
- MGCP/NCS

### Voice Processing

- Vocoders: G.711 (A-law,  $\mu$ -law), G.723.1, G.726, G.729a/b
- G.168 echo cancellation (64ms)
- DTMF detection and generation
- Carrier tone detection and generation
- Silence detection / suppression and Comfort Noise Generation level software adjustable
- Configurable dejitter buffer
- Configurable tones (dial, ringing, busy)
- Configurable transmit packet length
- RTP/RTCP - RFC 1889, RFC 1890, RFC 2833, RFC 3389

### Fax and Modem Support

- Group 3/Super G3 Fax real-time FoIP over clear channel (G.711), G.726 or T.38
- T.38 Fax relay (9.6 k, 14.4 k)
- G.711 Fax and Modem Bypass

### Management

- Web-based GUI
- TFTP, HTTP configuration up- and download (Auto-provisioning)
- TFTP, HTTP firmware upgrade
- SNMPv1, v2 and v3 agent (MIB II and private MIB)

### WAN Connection

- 1 x 10/100 Base T Ethernet RJ-45 connector

### Analog Connection

- Mediatrix 4124: 1 x RJ-21X TELCO 25 pairs connector, analog phone/fax (FXS) interface.
- Mediatrix 4116: 16 x RJ-11 connectors, analog phone/fax (FXS) interfaces.
- Mediatrix 4108: 8 x RJ-11 connectors, analog phone/fax (FXS) interfaces.

### Bypass Connection

- 1 RJ-11 connector, PSTN bypass

### QoS

- TOS/DiffServ
- IEEE 802.1p/Q

### Enhanced Telephony Features

- Call Forward / Call Transfer / 3-way Conference Call / Call Waiting / Caller ID on Call Waiting / Call on Hold
- Dynamic De-Jitter Manager
- Voice Activity Detection/ Comfort Noise

### Operating Environment

- Operating temperature: 0°C to 40°C
- Storage temperature: -20°C to 70°C
- Humidity: up to 85%, non-condensing

### Power Supply


- AC: Standard power cord receptacle (IEC 320-C14) for universal AC input internal SMPS

### Unit Dimensions and Weight

- 5.5 cm x 26.0 cm x 17.7 cm (1.8 in. x 18.9 in. x 8.6 in)
- Unit Weight 1781 g (3.9lbs)

## Applications

### Multi-tenant / Multi-dwelling solution

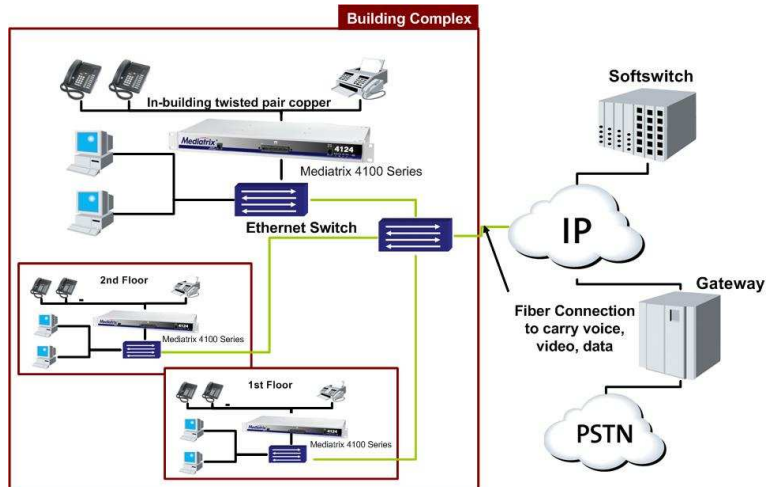

### Main Advantages:

- Interoperable with equipment from leading industry vendors
- Major savings in long-distance and PSTN access fees
- Re-use of existing infrastructure such as analog phones and faxes
- Simplified wiring = savings in ADDS/MOVES/CHANGES
- Compliancy to current legacy standards increases compatibility with actual PBX or Key systems.
- Access to essential PSTN Emergency calls capabilities even during power outages